





DEGSON ELECTRONICS CO., LTD.

Product Specification

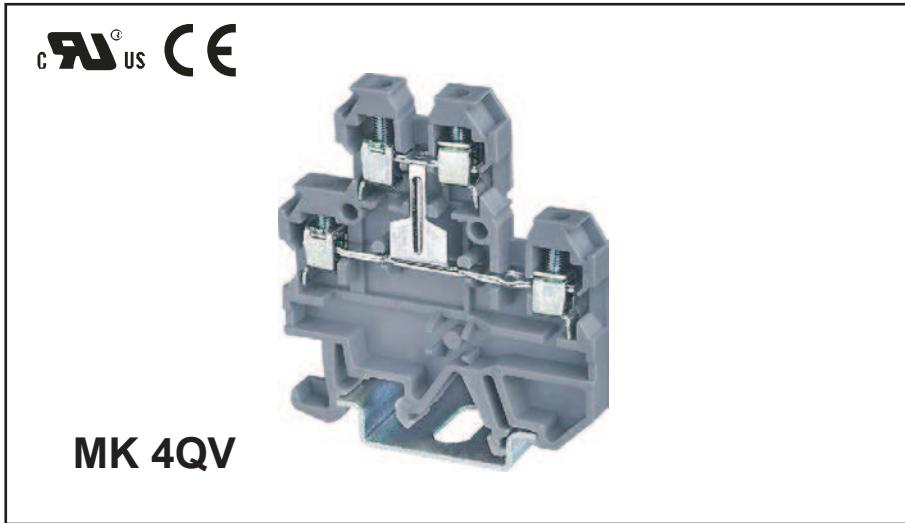

Approval	UL [®] US	CE
Electrical		
Standard	UL	IEC
Voltage	300V	500V
Current	20A	32A
Wire size	22-12AWG	0.5-4.0mm ²
T/W/End plate		6/54/1.5mm 60.5/68/60mm
Height(NS35:7.5/NS35:15/NS32)		
Rated surge voltage/Contamination class		6KV/3
Stripping length		8mm
Screw thread/Tightening torque		M3/0.5N.m/12.5Lb-in
Insulating material/Inflammability class		PAV-0
Specification	Model	Pieces
(1)Terminal block	MK4QV	100
(2)Cover	D-MK4Q	100
(3)Partition plate	WTW-4Q	20
(4)Separating plate	TSCH 6	100
(5)Cross connection links	Q 2-4Q Q 3-4Q Q 4-4Q Q 10-4Q	50 25 16 50
(6)Protective covers	AD 3-4Q AD 4-4Q	
(7)Test plug		
(8)Lockout device		
(9)Test plug		
(8)Zack strip	DEK 5	100

HOW TO ORDER :

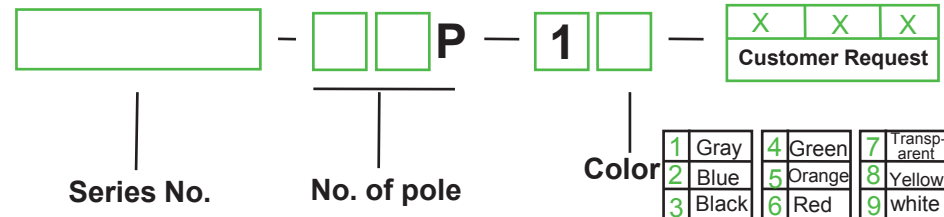

 mm (INCH)	 THIROANGLE PROJECTION	 DEGSON ELECTRONICS CO., LTD.
NAME		MK 4QV