

# TERMINAL BLOCK Connector



## Pluggable Series

KLS2-EDK-5.00/5.08 Series Pitch=5.00mm/5.08mm

### Electrical :


Rated voltage: 300V  
 Rated current: 15A  
 Contact resistance: 20mΩ  
 Insulation resistance: 5000MΩ/DC1000V  
 Withstanding Voltage: AC2000V/1Min  
 Wire range: 28-12AWG 2.5mm<sup>2</sup>

### Material

Contact: Phosphor bronze  
 Screws: M2.5, steel, Zinc plated  
 Housing: PA66, UL94V-0

### Mechanical

Temp. Range: -40°C~+105°C  
 Torque: 0.4Nm(3.6Lb.in)  
 Strip length: 7-8mm

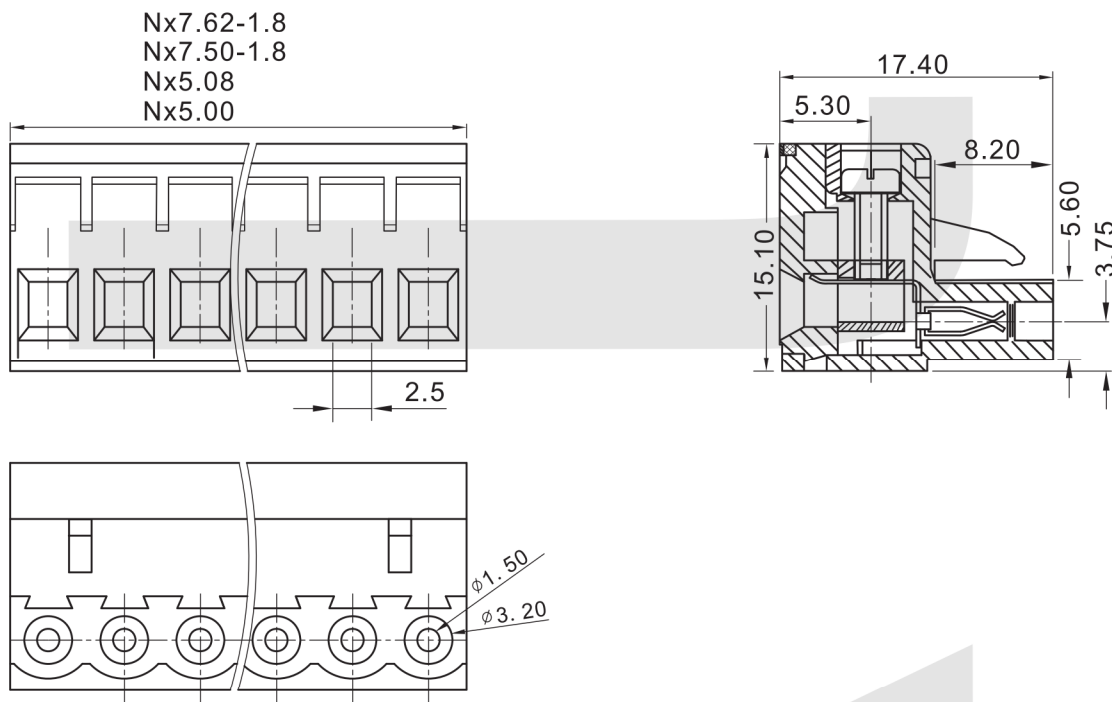

## ORDER INFORMATION

Product NO.: KLS2-EDK-5.00-XXP X X X

Pos. NO.	Customer Request
Series No.	Screw: C=Cross Screw S=Slot Screw
Pitch 5.00=5.00mm 5.08=5.08mm	Color: 1=Gray 2=Blue 3=Black
7.50=7.50mm 7.62=7.62mm	4=Green 5=Orange 6=Red
Number of Pole	7=Transparent 8=Yellow 9=White